

## TJEP CPX 27 Concrete Pin, Electrogalvanized

### Application

Fixation of drywall tracks.

Fixation of wiring accessories/conduit fasteners.

### Approval



Fire protection approval

### Material properties

Total length L: 16, 20, 25, 30, 35 & 40 mm


Black collated strip.

Electrogalvanized, average thickness  $\geq 5 \mu\text{m}$ .

Hardness 53-56 HRC

### Suitable tools

TJEP CP-40 GAS 3G concrete nailer or similar.

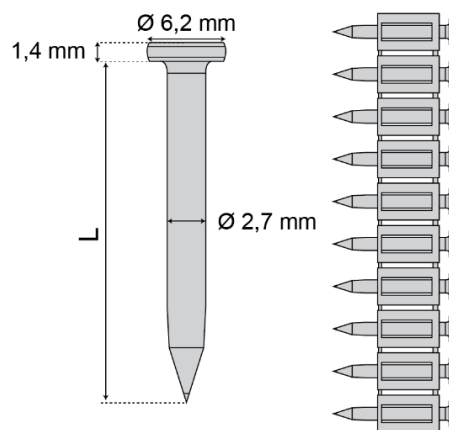

### Product list

| Range     | Length of shank (L) | Item no. |
|-----------|---------------------|----------|
| CPX 27/16 | 16                  | 839290   |
| CPX 27/20 | 20                  | 839291   |
| CPX 27/25 | 25                  | 839292   |
| CPX 27/30 | 30                  | 839293   |
| CPX 27/35 | 35                  | 839294   |
| CPX 27/40 | 40                  | 839295   |

### RECOMMENDED LOAD

| TJEP CPX 27 Range  | Embedment                | Characteristic resistance |                      |
|--------------------|--------------------------|---------------------------|----------------------|
|                    |                          | N <sub>Rk</sub> (kN)      | V <sub>Rk</sub> (kN) |
| Concrete<br>C30/37 | H <sub>nom</sub> = 12 mm | 0,36                      | 0,15                 |
|                    | H <sub>nom</sub> = 20 mm | 0,74                      | 0,47                 |